




Air Cleaning Specialists, Inc.

ACSF-247-FL

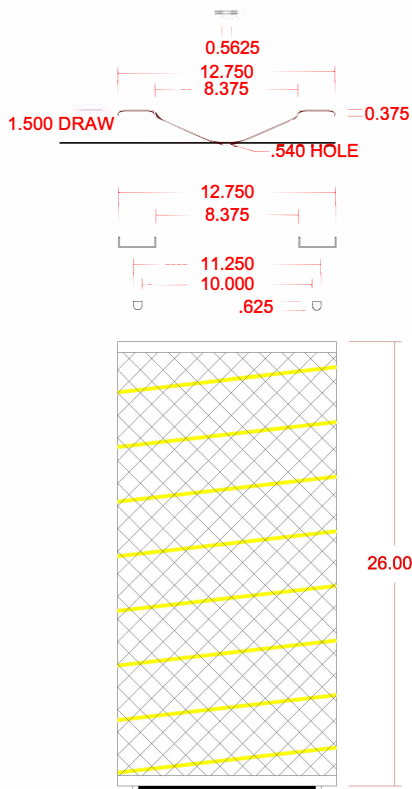

CONSTRUCTION:

ELECTROPLATED GALVANIZED OPEN END CAP
ELECTROPLATED GALVANIZED CLOSED END CAP W/ BOLT HOLE
G-90 GALVANIZED LARGE DIAMOND EXPANDED METAL OUTER BODY
G-90 GALVANIZED EXPANDED METAL INNER CORE
210 SQUARE FEET ULTRA-LIFE FLAME RETARDANT MEDIA
EPDM RUBBER SEALING GASKET APPLIED TO ONE OPEN END CAP
PVC SEALANT APPLIED TO BOTH ENDS
HOT MELT ADHESIVE BEAD APPLIED OUTSIDE ONLY
PACKAGED ONE PER CARTON
WEIGHT: 16 POUNDS

EFFICIENCY: (INITIAL 52.2-2007)

TEST FLOW RATE: 1000 CFM
INITIAL RESISTANCE: 0.74 INCHES W.G.
FINAL RESISTANCE: 4.00 INCHES W.G.
E1 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 0.30 - 1.00 MICRON: 95%
E2 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 1.0 - 3.0 MICRON: 99%
E3 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 3.0 - 10.0 MICRON: 100%
MINIMUM EFFICIENCY REPORTING VALUE: MERV 15 @ 1000 CFM

MINIMUM EFFICIENCY REPORTING VALUE: (PER ASHRAE 52.2-2012)

MERV 15

MEDIA:

ULTRA-LIFE MEDIA IS A DUAL LAYER COMPOSITION DESIGNED TO OFFER HIGH INITIAL EFFICIENCY. THE SURFACE LOADING CHARACTERISTICS ALLOW EXCELLENT RELEASE CAPACITY TO PROMOTE LONG LIFE NECESSARY IN PULSE COLLECTOR APPLICATIONS. ANTIMONY TRIOXIDE IS USED AS THE FLAME RETARDANT AGENT.