


# ACSF-319-FL

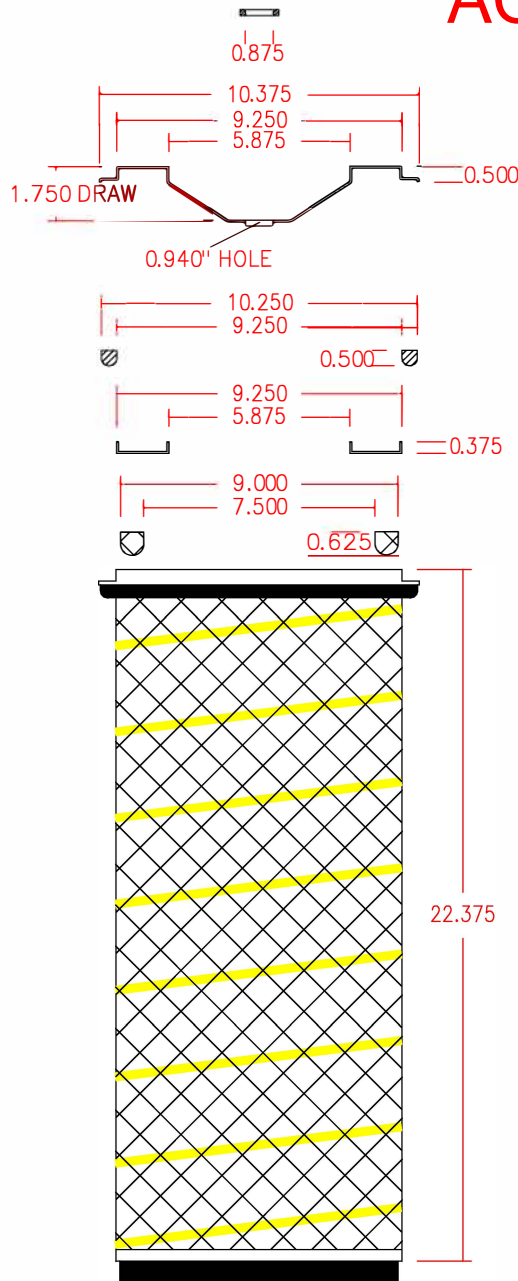

## CONSTRUCTION

ELECTROPLATED GALVANIZED END CAPS  
 G- 90 GALVANIZED EXPANDED METAL OUTER BODY  
 G- 90 GALVANIZED EXPANDED METAL INNER CORE  
 100 SQUARE FEET (200 PLEATS) ULTRA- LIFE FLAME RETARDANT MEDIA  
 SPIRAL BEAD OF HOT MELT ADHESIVE APPLIED OUTSIDE ONLY  
 EPDM RUBBER SEALING GASKETS APPLIED TO BOTH END CAPS  
 PVC PLASTISOL SEALANT APPLIED TO BOTH ENDS  
 PACKAGED ONE PER BOX  
 8 LBS. EACH

## OPERATING EFFICIENCY: ( PER ASHRAE 52.2 – 2007)

>85% @ 0.3– 1.0 MICRON  
 >90% @ 1.0– 3.0 MICRON  
 >95% @ 3.0– 10.0 MICRON

## MINIMUM EFFICIENCY REPORTING VALUE:

MERV 15

NOTE: THIS FILTER DOES NOT COME WITH MACHINED NUT