


ACSF-143-FL

ACS

Air Cleaning Specialists, Inc.

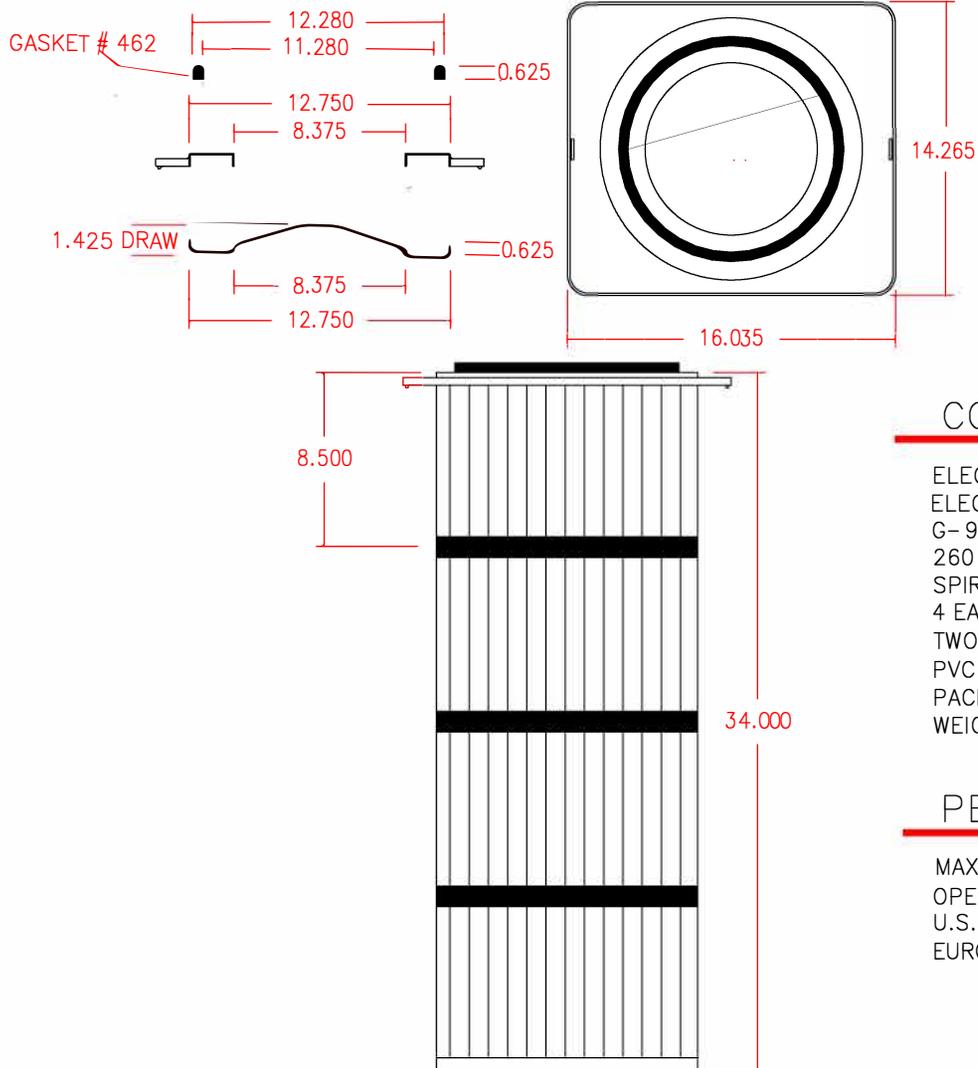

CONSTRUCTION:

ELECTROPLATED GALVANIZED OPEN ENDCAP WITH THE FARR STYLE GOLD SERIES FLANGE
ELECTROPLATED GALVANIZED CLOSED END CAP
G- 90 GALVANIZED EXPANDED METAL INNER CORE
260 PLEATS (264 SQUARE FEET) CELLULOSE/SYNTHETIC MEDIA
SPIRAL BEAD OF HOT MELT ADHESIVE APPLIED TO THE O.D.
4 EA/ POLYESTER BANDS GLUED TO THE PLEAT PACK O.D. FOR STABILITY
TWO EPDM RUBBER SEALING GASKETS APPLIED TO THE FLANGED END CAP
PVC SEALANT APPLIED TO BOTH ENDS
PACKAGED ONE PER CARTON
WEIGHT:25 POUNDS

PERFORMANCE DATA:

MAXIMUM CONTINUOUS OPERATING TEMPERATURE: 200 DEGREES F.
OPERATING EFFICIENCY: 99.99% ON 0.5 MICRON
U.S. EFFICIENCY RATING PER ASHRAE 52.2 TEST STANDARDS: MERV 11
EUROPEAN EFFICIENCY RATING: EN 779- F6