




Air Cleaning Specialists, Inc.

ACSF-198-FL

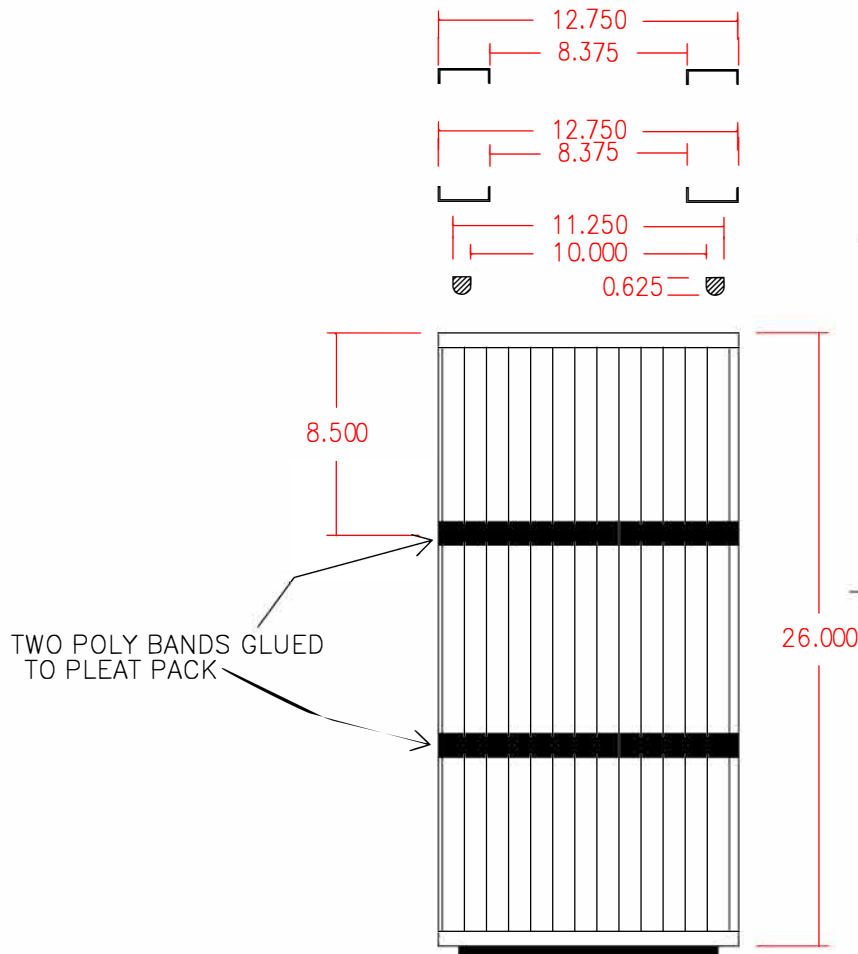

CONSTRUCTION:

- ELECTROPLATED GALVANIZED OPEN END CAP
- ELECTROPLATED GALVANIZED OPEN END CAP
- G-90 GALVANIZED EXPANDED METAL INNER CORE
- 100 SQUARE FEET SPUNBONDED POLYESTER MEDIA
- TWO POLYESTER STRAPS GLUED TO THE PLEAT PACK
- EPDM RUBBER SEALING GASKET APPLIED TO ONE OPEN END CAP
- URETHANE SEALANT APPLIED TO BOTH ENDS
- PACKAGED ONE PER CARTON
- WEIGHT: 13 POUNDS

EFFICIENCY: (PER ASHRAE 52.2)

- FRASER AIRFLOW - 23 CFM
- INITIAL RESISTANCE: 0.74 INCHES W.G.
- FINAL RESISTANCE: 4.00 INCHES W.G.
- E1 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 0.30 - 1.00 MICRON: >20%
- E2 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 1.0 - 3.0 MICRON: >65%
- E3 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 3.0 - 10.0 MICRON: >85%
- MINIMUM EFFICIENCY REPORTING VALUE: MERV 11 @ 750 CFM