




Air Cleaning Specialists, Inc.

ACSF-222-FL

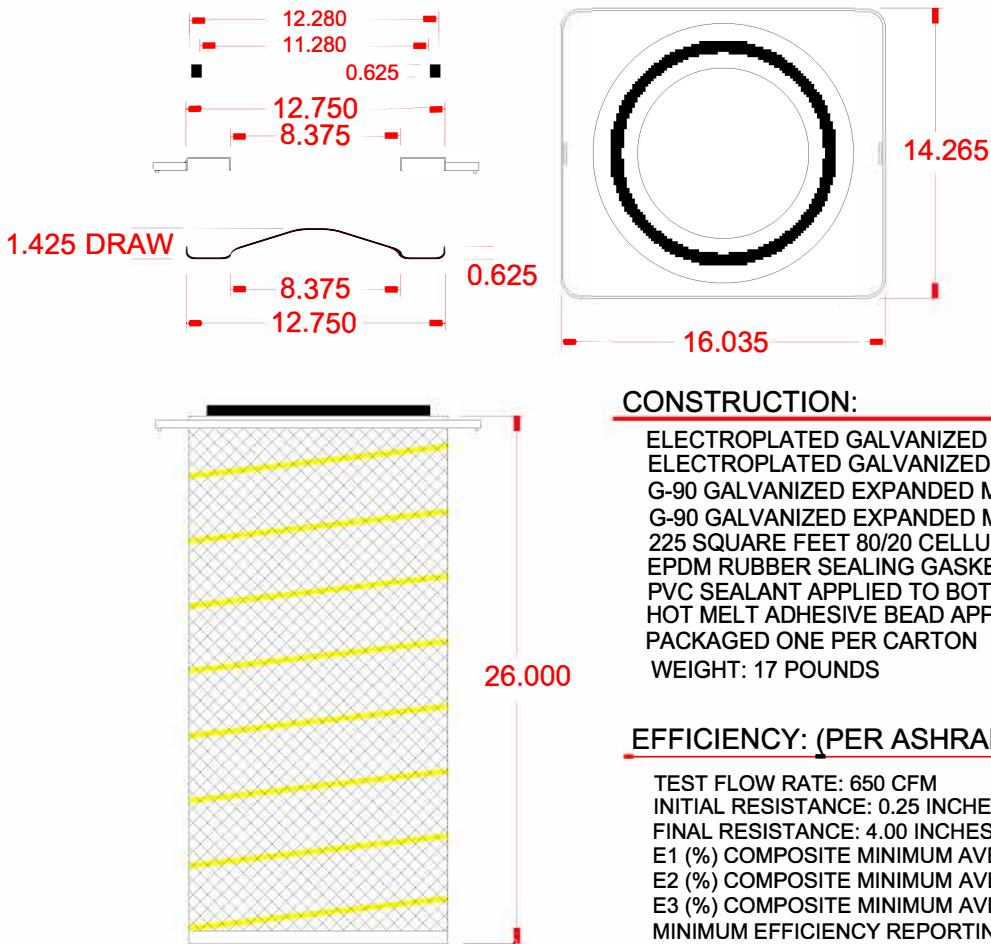

CONSTRUCTION:

ELECTROPLATED GALVANIZED CLOSED END CAP
ELECTROPLATED GALVANIZED OPEN END CAP WITH FARR® STYLE FLANGE
G-90 GALVANIZED EXPANDED METAL OUTER BODY
G-90 GALVANIZED EXPANDED METAL INNER CORE
225 SQUARE FEET 80/20 CELLULOSE/SYNTHETIC MEDIA
EPDM RUBBER SEALING GASKET APPLIED TO ONE OPEN END CAP
PVC SEALANT APPLIED TO BOTH ENDS
HOT MELT ADHESIVE BEAD APPLIED OUTSIDE ONLY
PACKAGED ONE PER CARTON
WEIGHT: 17 POUNDS

EFFICIENCY: (PER ASHRAE 52.2-2007)

TEST FLOW RATE: 650 CFM
INITIAL RESISTANCE: 0.25 INCHES W.G.
FINAL RESISTANCE: 4.00 INCHES W.G.
E1 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 0.30 - 1.00 MICRON: >20%
E2 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 1.0 - 3.0 MICRON: >65
E3 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 3.0 - 10.0 MICRON: >85
MINIMUM EFFICIENCY REPORTING VALUE: MERV 11 @ 650 CFM