




Air Cleaning Specialists, Inc.

ACSF-237-FL

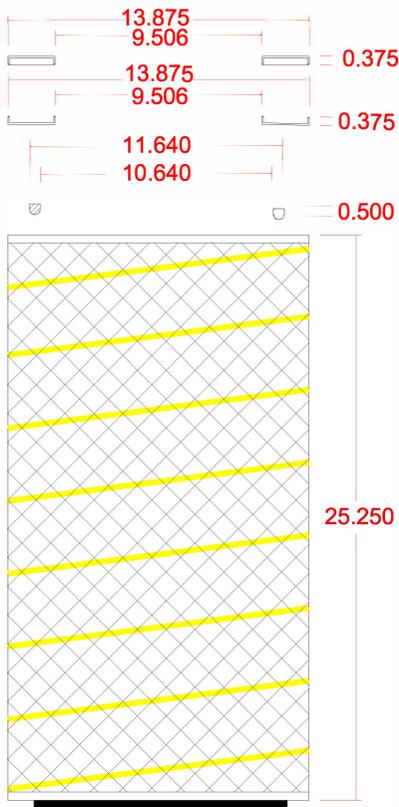

CONSTRUCTION:

ELECTROPLATED GALVANIZED OPEN END CAP
ELECTROPLATED GALVANIZED OPEN END CAP
G-90 GALVANIZED EXPANDED METAL OUTER BODY
G-90 GALVANIZED EXPANDED METAL INNER CORE
220 SQUARE FEET 80/20 CELLULOSE/SYNTHETIC MEDIA
ISOPRENE RUBBER SEALING GASKET APPLIED TO ONE OPEN END CAP
URETHANE SEALANT APPLIED TO BOTH ENDS
HOT MELT ADHESIVE BEAD APPLIED OUTSIDE ONLY
PACKAGED ONE PER CARTON
WEIGHT: 16 POUNDS

EFFICIENCY: (PER ASHRAE 52.1-1992)

TEST FLOW RATE: 500 CFM
INITIAL RESISTANCE: .59 INCHES W.G.
INITIAL DUST SPOT EFFICIENCY: 51.8%
DUST SPOT EFFICIENCY AT 1" W.G.: 98%
DUST SPOT EFFICIENCY AT 2" W.G.: 99%
DUST SPOT EFFICIENCY AT 4" W.G.: 100%
AVERAGE ATMOSPHERIC DUST SPOT EFFICIENCY: 97%
AVERAGE SYNTHETIC DUST WEIGHT ARRESTANCE: 100%
ASHRAE DUST HOLDING CAPACITY: 5900 GRAMS

MINIMUM EFFICIENCY REPORTING VALUE: (PER ASHRAE 52.2-2012)

MERV 11