




Air Cleaning Specialists, Inc.

### ACSF-239-FL

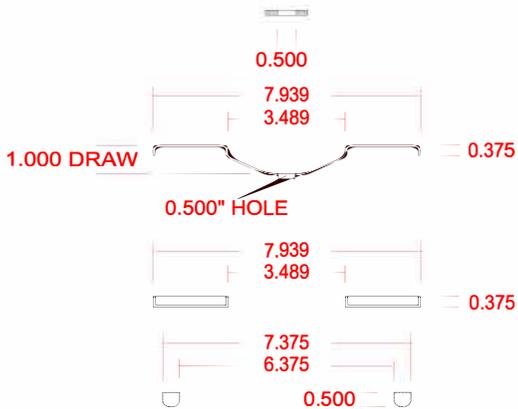

CONSTRUCTION:

ELECTROPLATED GALVANIZED OPEN END CAP  
 ELECTROPLATED GALVANIZED CLOSED END CAP W/ BOLT HOLE  
 G-90 GALVANIZED LARGE DIAMOND EXPANDED METAL OUTER BODY  
 G-90 GALVANIZED EXPANDED METAL INNER CORE  
 62 SQUARE FEET ULTRA-LIFE MEDIA  
 EPDM RUBBER SEALING GASKET APPLIED TO OPEN END CAP  
 PVC SEALANT APPLIED TO BOTH ENDS  
 HOT MELT ADHESIVE BEAD APPLIED OUTSIDE ONLY  
 PACKAGED ONE PER CARTON

EFFICIENCY: (PER ASHRAE 52.2-2012)

INITIAL RESISTANCE: .66 INCHES W.G.  
 0.3 - 1.0 MICRON EFFICIENCY: 95%  
 1.0 - 3.0 MICRON EFFICIENCY: 98%  
 3.0 - 10.0 MICRON EFFICIENCY: 100%

MINIMUM EFFICIENCY REPORTING VALUE: ( PER ASHRAE 52.2-2012)

MERV 15

MEDIA:

ULTRA-LIFE MEDIA IS A DUAL LAYER COMPOSITION DESIGNED TO OFFER HIGH INITIAL EFFICIENCY. THE SURFACE LOADING CHARACTERISTICS ALLOW EXCELLENT RELEASE CAPACITY TO PROMOTE LONG LIFE NECESSARY IN PULSE COLLECTOR APPLICATIONS

