


ACSF-260-FL

DOUBLE GASKET APPLIED NEAR OUTSIDE OF RECTANGLE

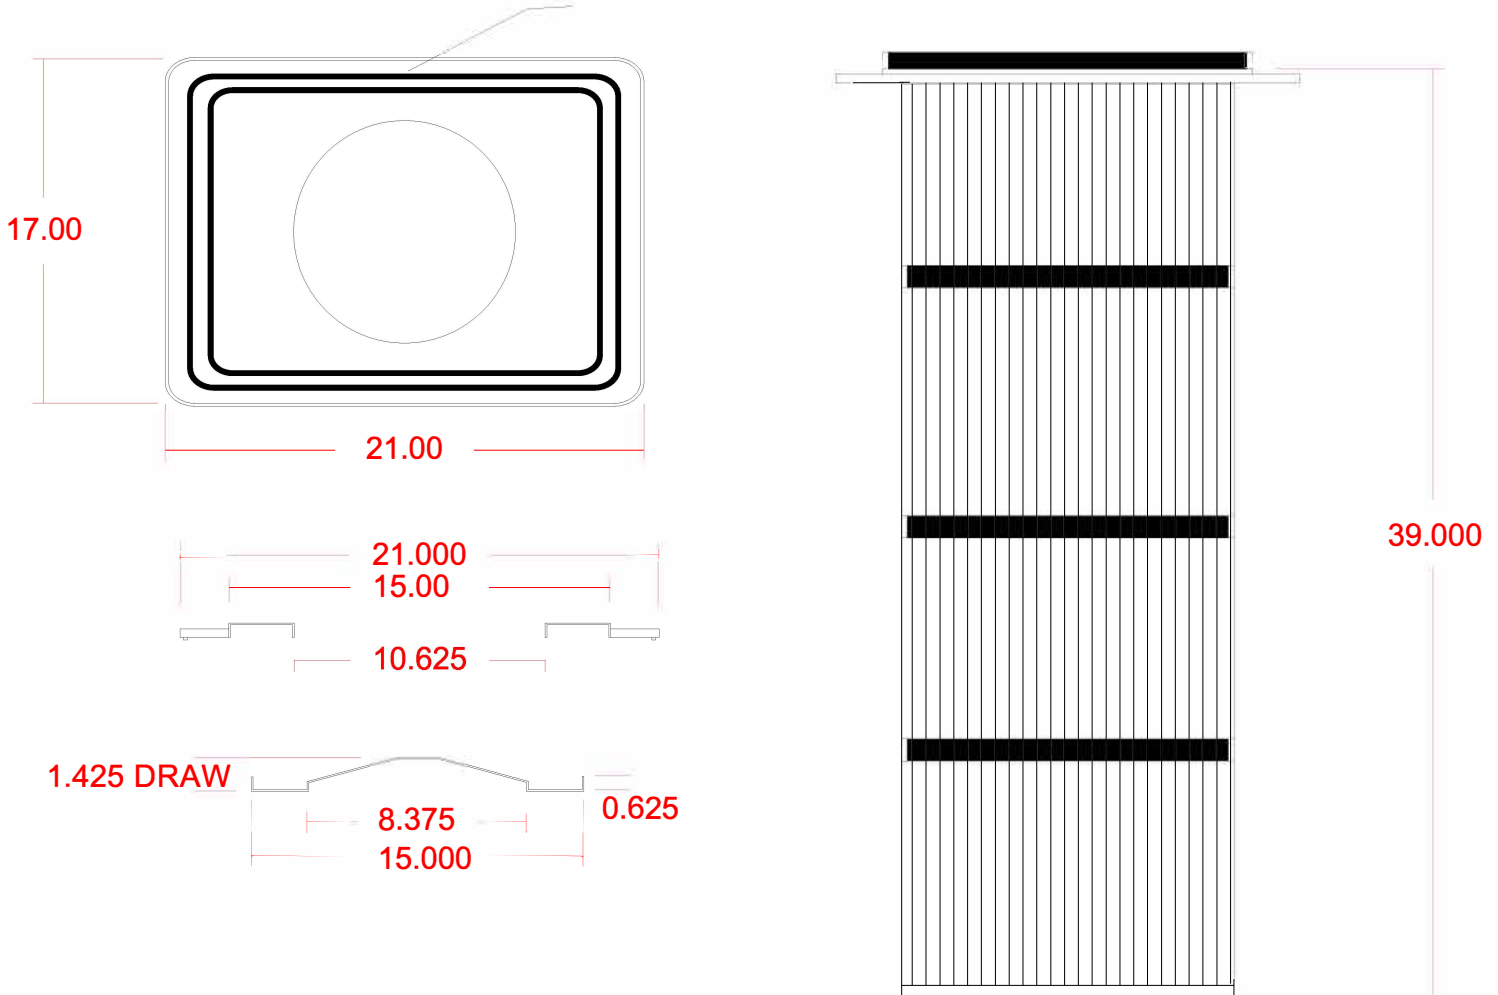

CONSTRUCTION:

ELECTROPLATED GALVANIZED OPEN ENDCAP WITH THE FARR STYLE GOLD SERIES FLANGE
ELECTROPLATED GALVANIZED CLOSED END CAP
G-90 GALVANIZED EXPANDED METAL INNER CORE
360 SQFT - FIRE RETARDANT NANOFIBER MEDIA
3 EA/ POLYESTER BANDS GLUED TO THE PLEAT PACK O.D. FOR STABILITY
TWO EPDM RUBBER SEALING GASKETS APPLIED TO THE FLANGED END CAP
PVC SEALANT APPLIED TO BOTH ENDS
PACKAGED ONE PER CARTON
WEIGHT:27 POUNDS

EFFICIENCY: (PER ASHRAE 52.2-2012)

E1 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 0.30 - 1.00 MICRON: 95%
E2 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 1.0 - 3.0 MICRON: 99%
E3 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 3.0 - 10.0 MICRON: 100%
MINIMUM EFFICIENCY REPORTING VALUE: MERV 15