




Air Cleaning Specialists, Inc.

ACSF-297-FL

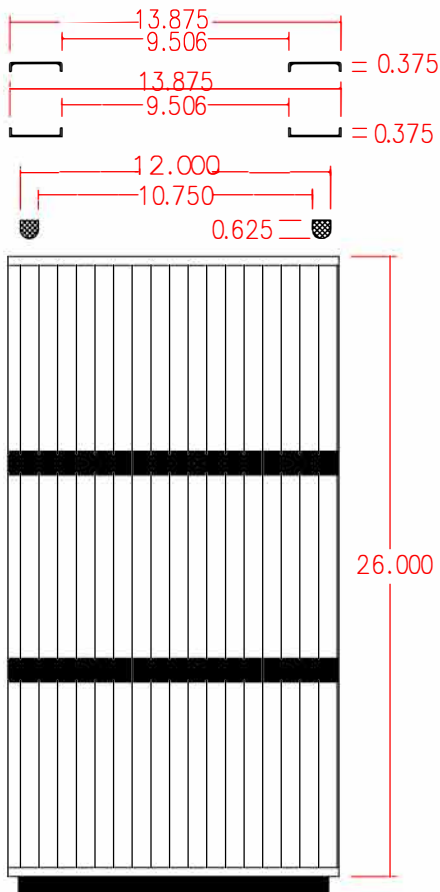

CONSTRUCTION:

GALVANIZED STEEL OPEN END CAP ON TOP AND BOTTOM
GALVANIZED STEEL EXPANDED METAL INNER CORE
TWO NYLON BANDS ON OUTER BODY
130 SQ FT SPUNBOND PTFE MEDIA
5/8" EPDM SEALING GASKET APPLIED TO ONE OPEN END CAP
URETHANE SEALANT APPLIED TO BOTH ENDS
PACKAGED ONE PER CARTON
WEIGHT: 17 POUNDS
275 DEGREES F – MAX CONTINUOUS OPERATING TEMP.

EFFICIENCY: (PER ASHRAE 52.2-2007)

FINAL RESISTANCE: 4.00 INCHES W.G.
E1 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 0.30 – 1.00 MICRON: >95%
E2 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 1.0 – 3.0 MICRON: >95%
E3 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 3.0 – 10.0 MICRON: >95%
MINIMUM EFFICIENCY REPORTING VALUE: MERV 16
AIR PERMEABILITY 5–8 CFM @ 0.5" W.G.