


ACS

Air Cleaning Specialists, Inc.

ACSF-301-FL

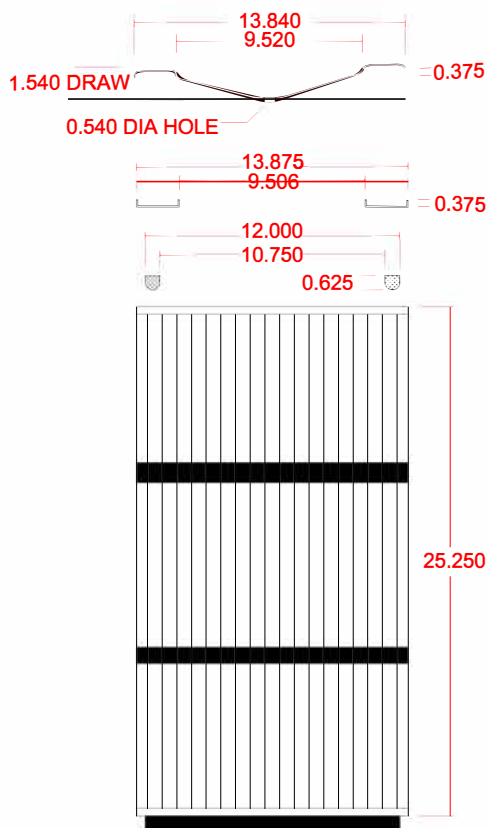

CONSTRUCTION:

ELECTROPLATED GALVANIZED CLOSED END CAP WITH BOLT HOLE
ELECTROPLATED GALVANIZED OPEN END CAP
TWO BANDS ON OUTSIDE OF PLEAT PACK
G-90 GALVANIZED EXPANDED METAL INNER CORE
230 SQUARE FEET 80/20 CELLULOSE SYNTHETIC BLENDED MEDIA
EPDM RUBBER SEALING GASKET APPLIED TO ONE OPEN END CAP
PVC SEALANT APPLIED TO BOTH ENDS
PACKAGED ONE PER CARTON
WEIGHT: 16 POUNDS

EFFICIENCY: (PER ASHRAE 52.2-2007)

TEST FLOW RATE: 650 CFM
INITIAL RESISTANCE: 0.25 INCHES W.G.
FINAL RESISTANCE: 4.00 INCHES W.G.
E1 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 0.30 - 1.00 MICRON: 20%>E1
E2 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 1.0 - 3.0 MICRON: 65%<E2
E3 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 3.0 - 10.0 MICRON: 85%<E3
MINIMUM EFFICIENCY REPORTING VALUE: MERV 11 @ 650 CFM