


ACSF-313-FL

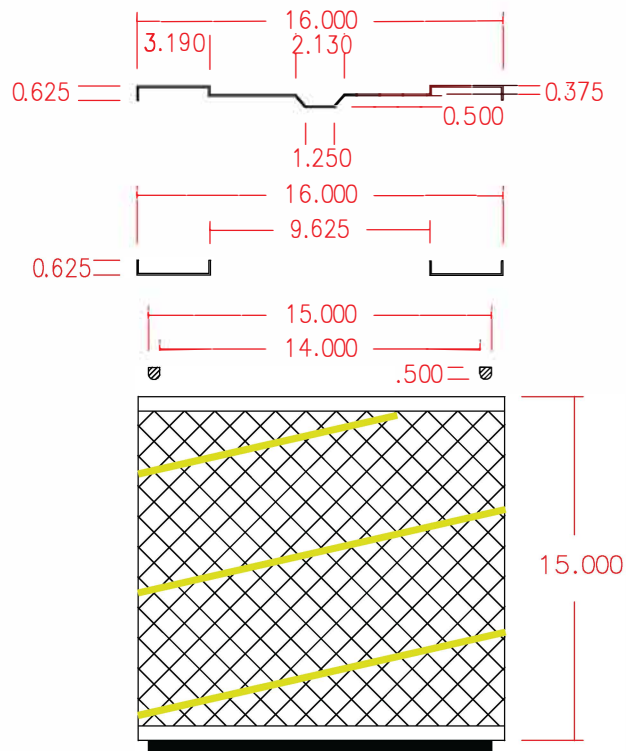

CONSTRUCTION:

ELECTROPLATED GALVANIZED CLOSED END CAP
 ELECTROPLATED GALVANIZED OPEN END CAP
 G-90 GALVANIZED EXPANDED METAL INNER CORE
 190 SQUARE FEET FIRE RETARDANT 80/20 CELLULOSE SYNTHETIC BLENDED MEDIA
 ISOPRENE RUBBER SEALING GASKET APPLIED TO THE OPEN END CAP
 POLYURETHANE SEALANT APPLIED TO BOTH ENDS
 HOT MELT ADHESIVE BEAD APPLIED OUTSIDE ONLY
 PACKAGED ONE PER CARTON
 WEIGHT: 17 POUNDS

EFFICIENCY: (PER ASHRAE 62.2)

TEST FLOW RATE: 750 CFM
 INITIAL RESISTANCE: 0.74 INCHES W.G.
 FINAL RESISTANCE: 4.00 INCHES W.G.
 E1 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 0.30 – 1.00 MICRON: 20
 E2 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 1.0 – 3.0 MICRON: 65
 E3 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 3.0 – 10.0 MICRON: 85
 MINIMUM EFFICIENCY REPORTING VALUE: MERV 11 @ 750 CFM