


ACSF-322-FL

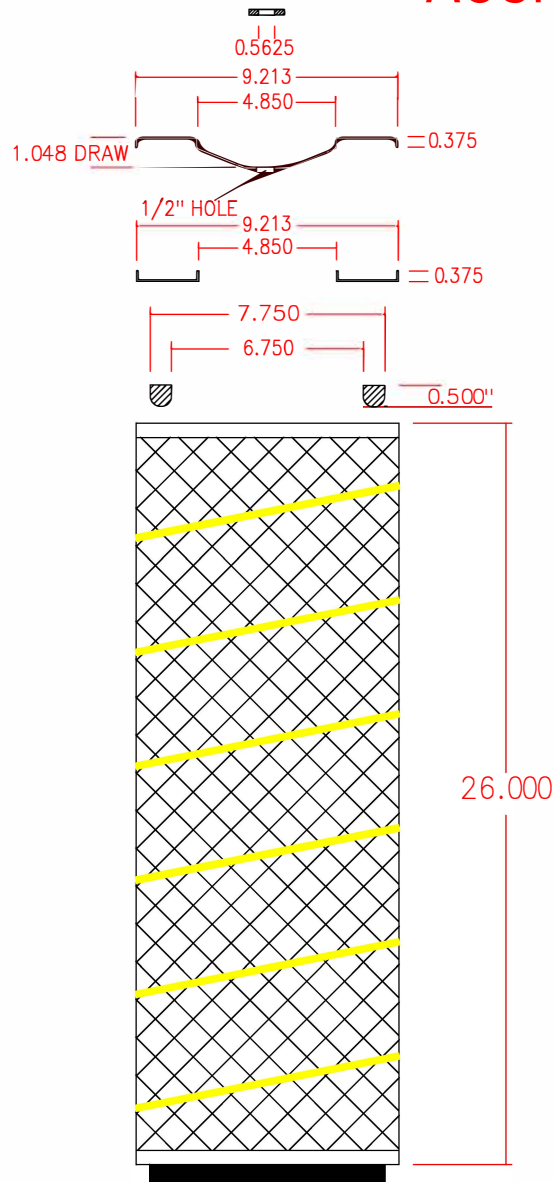

CONSTRUCTION:

ELECTROPLATED GALVANIZED CLOSED END CAP WITH 1/2" BOLT HOLE
 ELECTROPLATED GALVANIZED OPEN END CAP
 G-90 GALVANIZED EXPANDED METAL OUTER BODY
 G-90 GALVANIZED EXPANDED METAL INNER CORE
 145 PLTS - 100 SQUARE FEET 80/20 CELLULOSE/SYNTHETIC MEDIA
 1/2" EPDM RUBBER SEALING GASKET APPLIED TO ONE OPEN END CAP
 PVC SEALANT APPLIED TO BOTH ENDS
 HOT MELT ADHESIVE BEAD APPLIED OUTSIDE ONLY
 PACKAGED ONE PER CARTON
 WEIGHT: 16 POUNDS

EFFICIENCY: (PER ASHRAE 52.2-2007)

TEST FLOW RATE: 600 CFM
 INITIAL RESISTANCE: 0.25 INCHES W.G.
 FINAL RESISTANCE: 4.00 INCHES W.G.
 E1 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 0.30 - 1.00 MICRON: 20 > E1
 E2 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 1.0 - 3.0 MICRON: 65 < E1
 E3 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 3.0 - 10.0 MICRON: 85 < E1
 MINIMUM EFFICIENCY REPORTING VALUE: MERV 11 @ 650 CFM