



# ACSF-336-FL

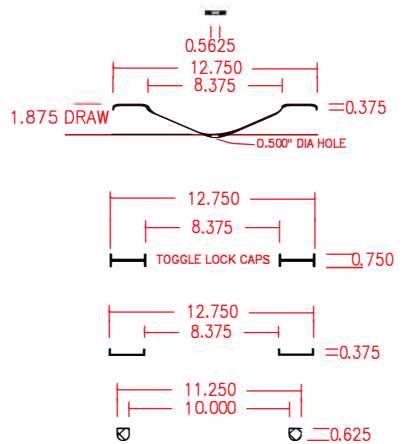

TOGGLED CAP IS PERMANENTLY SEALED TOGETHER

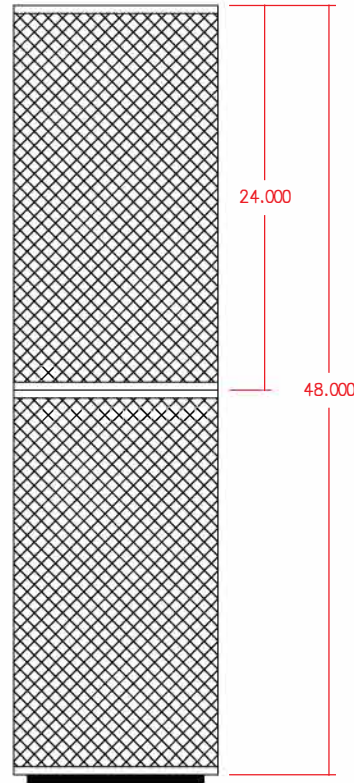

## CONSTRUCTION:

ELECTROPLATED GALVANIZED CLOSED END CAP W/ BOLT HOLE  
ELECTROPLATED GALVANIZED OPEN END CAP  
ELECTROPLATED GALVANIZED DOUBLE OPEN TOGGLED END CAP IN CENTER  
G- 90 GALVANIZED EXPANDED METAL INNER CORE  
G- 90 GALVANIZED EXPANDED METAL OUTER BODY  
200 SQUARE FEET SPUNBONDED POLYESTER MEDIA  
EPDM RUBBER SEALING GASKET APPLIED TO THE OPEN END CAP  
PVC SEALANT APPLIED TO BOTH ENDS  
PACKAGED ONE PER CARTON  
WEIGHT: 25 POUNDS

## PERFORMANCE DATA:

MAXIMUM CONTINUOUS OPERATING TEMPERATURE: 250 DEGREES F.  
U.S. EFFICIENCY RATING PER ASHRAE 52.2 TEST STANDARDS: MERV 11  
EUROPEAN EFFICIENCY RATING: EN 779- F6