


## ACSF-339-FL

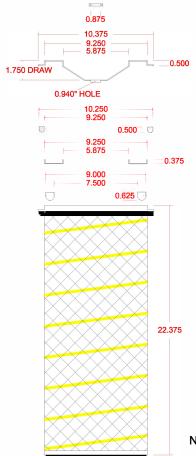

## CONSTRUCTION

ELECTROPLATED GALVANIZED END CAPS
G-90 GALVANIZED EXPANDED METAL OUTER BODY
G-90 GALVANIZED EXPANDED METAL INNER CORE
100 SQUARE FEET (200 PLEATS) 80/20 FLAME RETARDANT MEDIA
SPIRAL BEAD OF HOT MELT ADHESIVE APPLIED OUTSIDE ONLY
EPDM RUBBER SEALING GASKETS APPLIED TO BOTH END CAPS
PVC PLASTISOL SEALANT APPLIED TO BOTH ENDS
PACKAGED ONE PER BOX
8 LBS. EACH

OPERATING EFFICIENCY: (PER ASHRAE 52.2 - 2007)

>85% @ 0.3-1.0 MICRON >90% @ 1.0-3.0 MICRON >95% @ 3.0-10.0 MICRON

## MINIMUM EFFICIENCY REPORTING VALUE:

MERV 11

NOTE: THIS FILTER DOES NOT COME WITH MACHINED NUT