
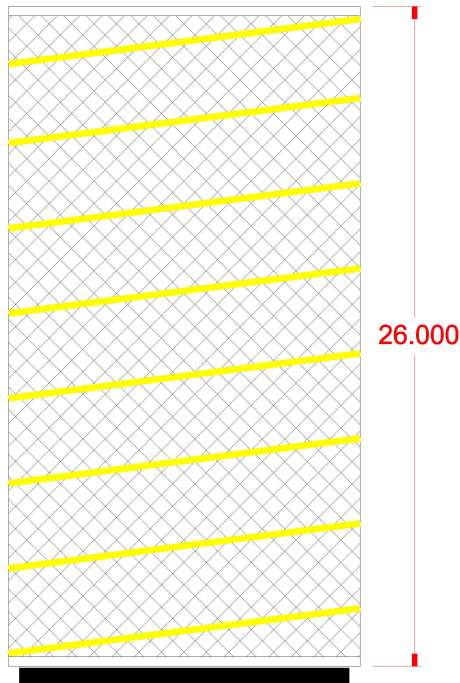


ACSF-355-FL

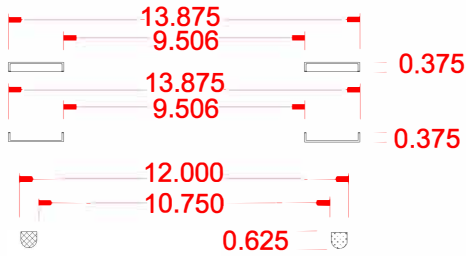

CONSTRUCTION:

ELECTROPLATED GALVANIZED OPEN END CAP
ELECTROPLATED GALVANIZED OPEN END CAP
G-90 GALVANIZED LARGE DIAMOND EXPANDED METAL OUTER BODY
G-90 GALVANIZED EXPANDED METAL INNER CORE
230 SQUARE FEET 80/20 FLAME RETARDANT MEDIA
EPDM RUBBER SEALING GASKET APPLIED TO ONE OPEN END CAP
PVC SEALANT APPLIED TO BOTH ENDS
HOT MELT ADHESIVE BEAD APPLIED OUTSIDE ONLY
PACKAGED ONE PER CARTON
WEIGHT: 16 POUNDS
OPERATING TEMPERATURE: 180 DEGREES FAHRENHEIT

EFFICIENCY: (PER ASHRAE 52.2 -1999)

TEST FLOW RATE: 500 CFM
INITIAL RESISTANCE: .59 INCHES W.G.
INITIAL DUST SPOT EFFICIENCY: 43.9%
DUST SPOT EFFICIENCY AT 1" W.G.: 98%
DUST SPOT EFFICIENCY AT 2" W.G.: 99%
DUST SPOT EFFICIENCY AT 4" W.G.: 100%
AVERAGE ATMOSPHERIC DUST SPOT EFFICIENCY: 97%
AVERAGE SYNTHETIC DUST WEIGHT ARRESTANCE: 100%
ASHRAE DUST HOLDING CAPACITY: 5900 GRAMS

MINIMUM EFFICIENCY REPORTING VALUE: (ASHRAE 52.2-2007)

MERV 11