


# ACSF-354-FL

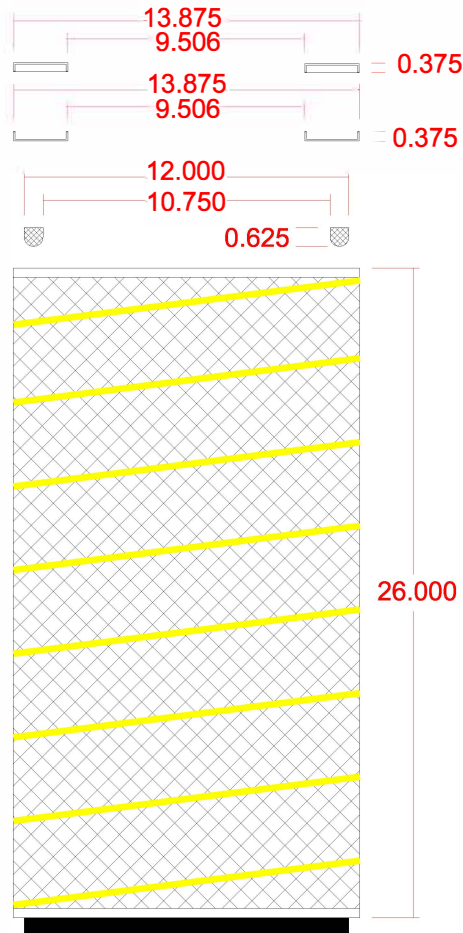

## CONSTRUCTION:

ELECTROPLATED GALVANIZED OPEN END CAP  
 ELECTROPLATED GALVANIZED OPEN END CAP  
 G-90 GALVANIZED EXPANDED METAL OUTER BODY  
 G-90 GALVANIZED EXPANDED METAL INNER CORE  
 254 SQUARE FEET ULTRA-LIFE FLAME RETARDANT MEDIA  
 EPDM RUBBER SEALING GASKET APPLIED TO ONE OPEN END CAP  
 URETHANE SEALANT APPLIED TO BOTH ENDS  
 HOT MELT ADHESIVE BEAD APPLIED OUTSIDE ONLY  
 PACKAGED ONE PER CARTON  
 WEIGHT: 16 POUNDS

## EFFICIENCY: (INITIAL 52.2-2007)

INITIAL RESISTANCE: 0.74 INCHES W.G.  
 FINAL RESISTANCE: 4.00 INCHES W.G.  
 E1 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 0.30 - 1.00 MICRON: > 95%  
 E2 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 1.0 - 3.0 MICRON: >99%  
 E3 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 3.0 - 10.0 MICRON: >100%  
 MINIMUM EFFICIENCY REPORTING VALUE: MERV 15 @ 1000 CFM

## MINIMUM EFFICIENCY REPORTING VALUE: ( PER ASHRAE 52.2-2012)

MERV 15

## MEDIA:

ULTRA-LIFE MEDIA IS A DUAL LAYER COMPOSITION DESIGNED TO OFFER HIGH INITIAL EFFICIENCY. THE SURFACE LOADING CHARACTERISTICS ALLOW EXCELLENT RELEASE CAPACITY TO PROMOTE LONG LIFE NECESSARY IN PULSE COLLECTOR APPLICATIONS